

THE PROJECTOR

LED PROJECTION LIGHT

60W, 120W, 180W, 240W, 300W & 360W
SPECIALTY LIGHT

- Innovative 7° Beam Technology
- Shatter Resistant Lens
- Expected Life over 100,000 Hours
- Durable Die-Cast Powder Coated Aluminum Frame
- Rust-Proof Stainless Steel Hardware
- Industry-Leading 10-Year LED Board Warranty



POWER

Available from 60W up to
360W Configurations

PRECISION

High-Precision Optics are Paired with an
Engraved Protractor for Proper Aim

ENGINEERING

Folded-fin Heatsink Keeps High-Output
LEDs Cooler During Operation

ORDERING INFORMATION


EXAMPLE PART #: PRO - 120 - 40K - 7 - V01 - BL - VDIM - WG

PRO		7					
SERIES	WATTS	CCT	OPTICS	INPUT PWR	FINISH	DIMMING	OPTIONS
PRO	60 120 180 240 300 360	40K 50K 60K	7	V01 110/277V V04 347/480V	BL WT RAL	NDIM No Dimming VDIM 0-10V Dimmable DDIM DALI Dimming	VGS Visor Glare Shield WG Wire Guard

NOTES

- No Dimming Standard
- Custom RAL Colors Require Additional Costs & Lead Times

OPTICS

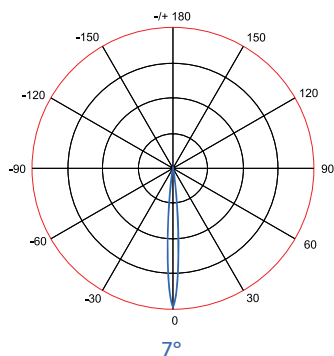

LUMEN CHART

	4000K	5000K	6000K
60W	4,080 lm	4,365 lm	4,671 lm
120W	8,024 lm	8,423 lm	8,867 lm
180W	12,310 lm	12,958 lm	13,640 lm
240W	15,900 lm	16,700 lm	17,600 lm
300W	20,529 lm	21,609 lm	22,747 lm
360W	24,447 lm	25,734 lm	27,089 lm

Typical delivered lumen data is approximate. Actual lumens will vary due to installation environment and beam pattern. Please see IES files.

Due to continuous improvement and innovation, product appearance and specifications may change without notice. Actual performance may differ as a result of end-user environment and application.

TOLL-FREE: 888-410-5337 | FAX: 614-868-5344 | © 2022 SpecGradeLED

www.SpecGradeLED.com

THE PROJECTOR

LED PROJECTION LIGHT



SPECIFICATIONS

Expected Life | Over 100,000 hrs.
Rating | IP65 Housing / IP66 Boards
Color Rendering Index (CRI) | >70
Operating Temp | -25°C – +65°C
Power Factor | >95%
Input Line Voltage | 90-305 / 200-525 VAC
Input Line Frequency | 50/60 Hz
LED Chips | Lumileds
Driver | Meanwell
Weight | 60W: 22lb - 120W: 23lb
180W: 35.25lb - 240W: 36.40lb
300W: 61.75lb - 360W: 64lb

LISTINGS


CE Listed

MATERIALS


Housing | Corrosion Resistant Aluminum
Gasketing | Neoprene Rubber
Hardware | 18-8 Stainless Steel
Finish | Protective UV Stabilized Powdercoat
4000 Hour Salt Spray Tested to ASTM B117
Lens | Tempered Glass

PRODUCT DRAWINGS


60W - 120W

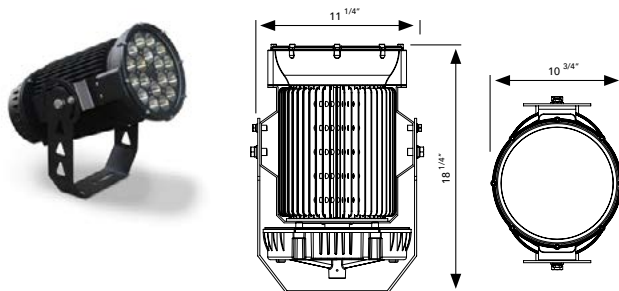

180W - 240W

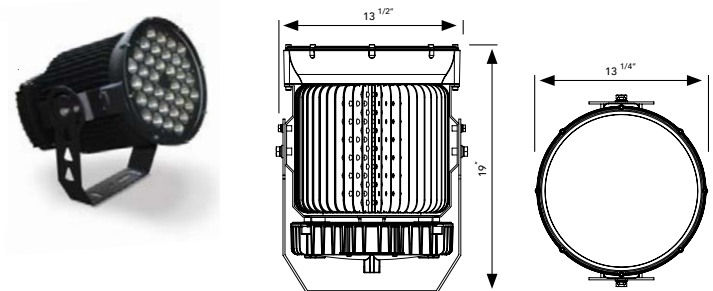

300W - 360W

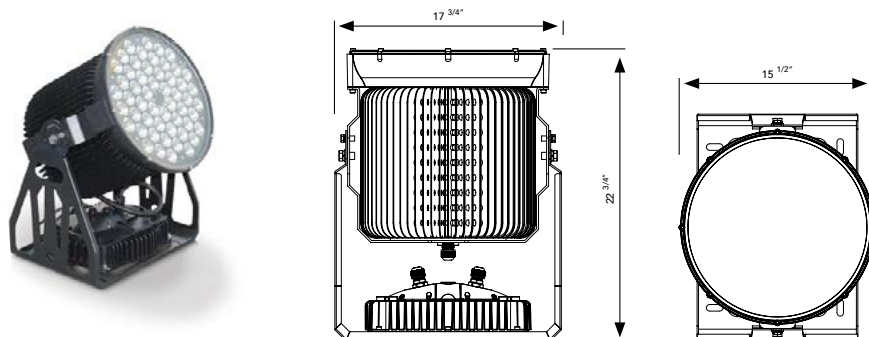

Due to continuous improvement and innovation, product appearance and specifications may change without notice. Actual performance may differ as a result of end-user environment and application.

TOLL-FREE: 888-410-5337 | FAX: 614-868-5344 | © 2022 SpecGradeLED

www.SpecGradeLED.com