


FreshGuard T8

T8 refrigerator tube does not contain mercury and xenon and other harmful elements. It will not produce electromagnetic radiation and harmful rays

Long Life
Low Heat Radiation
Small Energy Consumption
Conductive to Refrigerator Energy Saving




Dimensions

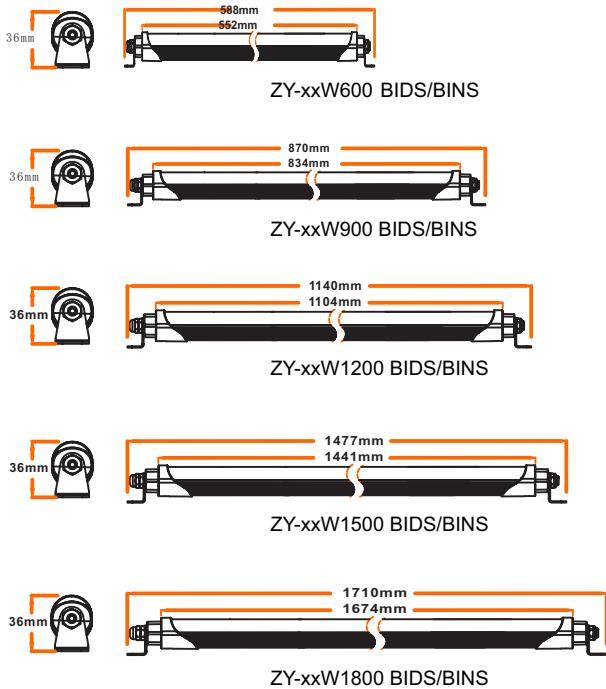


Specifications

Model NO.	ZY-30W1800 BINS ; ZY-22W1800 BINS ; ZY-22W1500 BINS ; ZY-22W1200 BINS ; ZY-18W1200 BINS ; ZY-15W1200 BINS ; ZY-12W1200 BINS ; ZY-15W900BINS ; ZY-12W900BINS ; ZY-10W600 BINS ; ZY-18W1200 BINS ; ZY-15W1200 BINS ; ZY-12W1200 BINS ; ZY-10W600 BINS ; ZY-8W600 BINS ; ZY-30W1800 BIDS ; ZY-22W1800 BIDS ; ZY-22W1500 BIDS ; ZY-22W1200 BIDS ; ZY-18W1200 BIDS ; ZY-15W1200 BIDS ; ZY-15W900BIDS ; ZY-12W1200 BIDS ; ZY-12W900BIDS ; ZY-10W600 BIDS ; ZY-8W600 BIDS
Construction	PC cover (transparent/milky white) + aluminum shell
Finish	Anodized Aluminum Finish
Hardware	Stainless steel
Light source	8W, 1120 lumens; 10W, 1400 lumens; 12W, 1680 lumens; 15W, 2100 lumens; 18W, 2520 lumens; 22W, 3080 lumens; 30W, 4200 lumens. Efficiency: 140 lm/W 130° beam angle CCT 3000K/3500K/4000K/4500K/5000K/5700K 50,000 hours rated life
Power source	120-277V, 50-60Hz Built-in power supply Over-voltage, over-current and short-circuit protection
Power factor	> 0.9
Wiring	Supplied with 50cm of 16/3 type SOW cord Wire entrance is factory sealed Color: White(120cm) or black(100cm)
Ambient temperature	-40°C to +40°C (-40°F to +104°F)
Packing size	ZY-xxW600 BIDS/BINS: 660mmX230mmX240mm ZY-xxW900 BIDS/BINS: 960mmX230mmX240mm ZY-xxW1200 BIDS/BINS: 1250mmX210mmX255mm ZY-xxW1500 BIDS/BINS: 1550mmX210mmX230mm ZY-xxW1800 BIDS/BINS: 1850mmX210mmX250mm
Warranty	5 years

Wiring Diagram

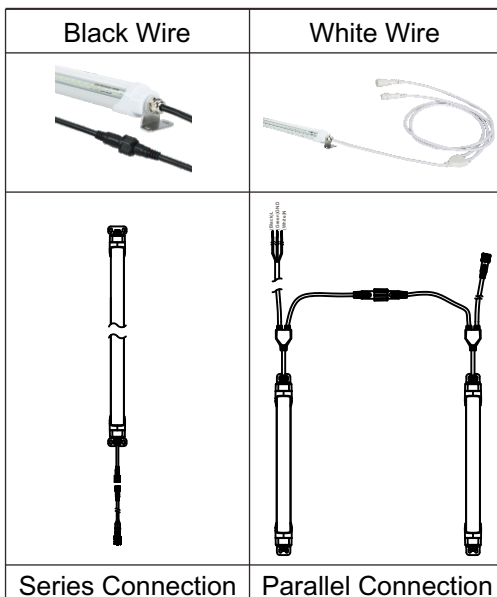

Photometrics



Ordering Information

Example: ZY-18W1200 BIDS

xxW: Rated Power
1200: Length
B: 2835 LED chips
I: Internal driver O: Outer driver
D: Dimmable N: Non-dimmable
S: Single Input

Due to continuous improvement and innovation, product appearance and specifications may change without notice. Actual performance may differ as a result of end-user environment and application.

TOLL-FREE: 888-410-5337 | FAX: 614-868-5344 | © 2026 SpecGrade

www.SpecGrade.com

china 523220