

CP-xxW BXYZ

CanopyMax-Black



Specifications:


- ⦿ Power Consumption(±5%): 45W/55W/70W(adjustable)
- ⦿ Input Voltage: AC100-277V
- ⦿ Power Factor: >0.95
- ⦿ Surge Protection: 6kV/10kV
- ⦿ Intelligent Control: 0-10V
- ⦿ Efficiency(±10%): 140lm/W
- ⦿ Color Temperature(CCT): 2700K-5700K
- ⦿ Color Rendering Index(CRI): ≥70
- ⦿ Beam Angle: 120°
- ⦿ Housing Material: Aluminum
- ⦿ Product Dimension: 266x266x75mm(10.5x10.5x3.0inch)
- ⦿ Packing Size: 420x330x325mm(16.5x13.0x12.8inch)
- ⦿ Luminaire Net Weight: 2.5kg(5.5lbs)
- ⦿ Gross Weight: 2.9kg(6.4lbs)
- ⦿ Mountings: Ceiling mounting, pendant mounting
- ⦿ Finish: Baking varnish
- ⦿ Fixture Color: Dark Bronze
- ⦿ IK Rating: IK09
- ⦿ IP Rating: IP66
- ⦿ Working Temperature: -30°C~+45°C(-22°F~+113°F)
- ⦿ Storage Temperature: -40°C~+80°C(-40°F~+176°F)
- ⦿ Lifespan: 50,000 hours
- ⦿ Warranty: 5 years

Product Applications:

Venas LED Canopy Lighting B series is applicable in indoor or outdoor areas (wet locations) like parking garages, mechanical or electronic processing workshops, storage warehouses, steel mills, gas stations, toll booths, waiting rooms, the platforms of railway stations, indoor stadiums and flower cultivating tents, etc.


Dimensions:

Unit: inch/mm

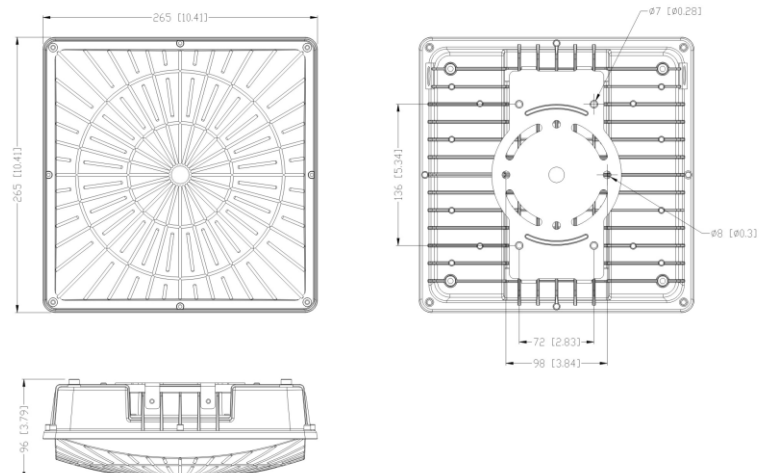


CanopyMax-Black

Light Distribution Curve (Clear Diffuser)

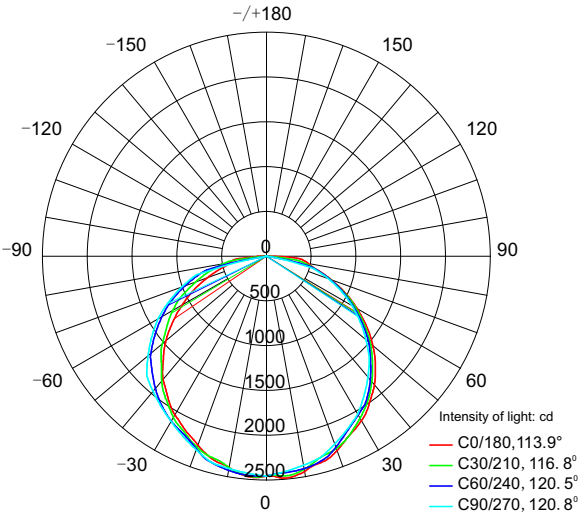


Mean beam angle(0%):118.0 D

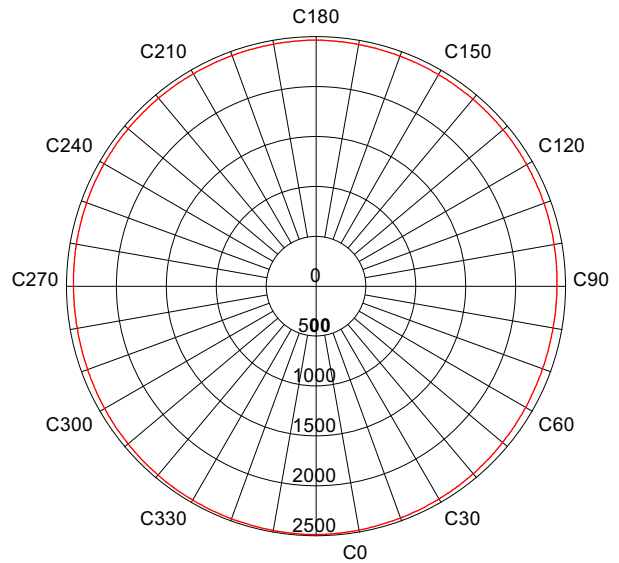

Max position Y=5.00°

Catalog Number Logic

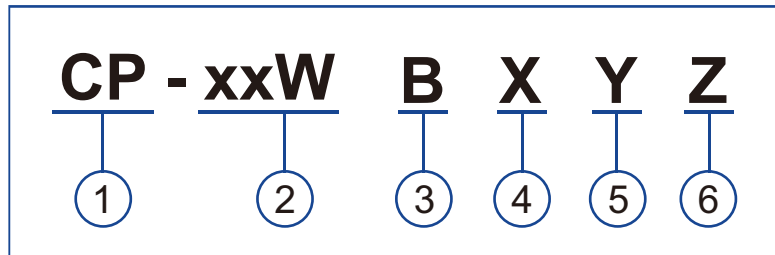

① PRODUCT CATEGORY

◆ LED Slim Canopy Light

② POWER

◆ 45W/55W/70W

③ MODEL

◆ B Series Canopy

④ DIMMING OPTION

◆ Y=D(Dimmable)
Y=N(Non-dimmable)

⑤ CCT

◆ Z can be 27, 30,40,50,57
denotes 4000K...5700K

⑥ Beam Angle

◆ A can be D40, D60, D90 or D120,
denotes 40°, 60°, 90° or 120°